



XT PRO RW

STANDARD MACHINES

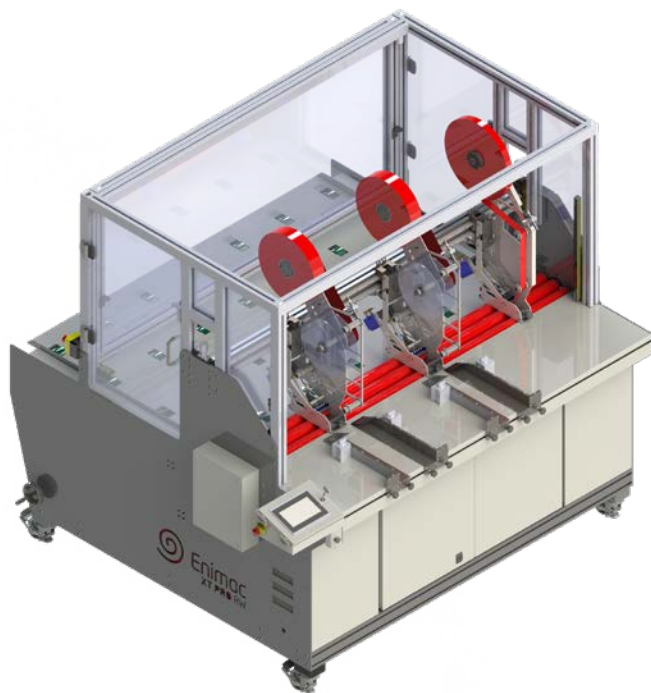

Characteristics

Widest format of substrate (accepted - edges taped)	1680 mm (66.1") - 1600 mm (63")
Thickest substrate	15 mm (just under 5/8")
Shortest strip of tape	25 mm (1")
Longest strip of tape (*can order longer)	3,0 m (10')
Standard number of consecutive tape strips ("spots") per sheet (*can order more)	4
Minimum distance between consecutive tape strips	25 mm (1")
Minimum distance between parallel tape strips (with 2 applicators side-by-side)	
Minimum substrate grammage	130 g/sqm
Structure	Complete mobile unit
Speed	10 m (33') / min - 50 m (164') / min
Applicators	PRO 30, 30 RW, 60, 60 RW
Maximum number of tape applicators	6
Max Length x Height x Depth	2315 mm x 1883 mm x 2189 mm (91.14" x 74.13" x 86.18")
Maximum power consumption	750 W

PRO RW